



DONUT ♦ BAKERY ♦ CUSTOM FOOD EQUIPMENT

509 BATEMAN CIRCLE ♦ CORONA, CA 92880

909/340-0280 ♦ 800/676-3040 ♦ FAX 909/340-0283



COMBINATION PROOFING CABINETS



COMBINATION PROOFING CABINETS



Avalon Proofing Cabinets are available in both Stainless Steel and Aluminum. All doors, inside racks, supports and heater units are totally removable without tools. Heater/humidity control unit has all exterior mounted controls allowing operator to adjust settings without opening the door. The door is 3/16" thick impact resistant clear polycarbonate panel sealed to a heavy duty stainless steel or aluminum mitered frame. These units come standard on heavy duty casters (2) with locking brakes. (Accommodates a wide variety of screens and pans).



MODEL	DIMENSIONS	ELECTRICAL	APX. SHIPPING WEIGHT
P264AC-1 (Alum. 1-DR)	28" W x 31" D x 70" H	120V/60HZ/1-PH. 20 AMPS	175 LBS.
P264AC-2 (Alum. 2-DR)	28" W x 31" D x 70" H	120V/60HZ/1-PH. 20 AMPS	175 LBS.
P264SC-1 (S/STEEL 1-DR)	28" W x 31" D x 70" H	120V/60HZ/1-PH. 20 AMPS	250 LBS.
P264SC-2 (S/STEEL 2-DR)	28" W x 31" D x 70" H	120V/60HZ/1-PH. 20 AMPS	250 LBS.

◆◆◆ ALSO AVAILABLE IN 208-240/50-60 HZ./1 PH.





509 Bateman Circle • Corona, CA 91720
TEL: (909) 340-0280 • FAX: (909) 340-0283
(800) 676-3040

INSTALLATION, OPERATING & MAINTENANCE INSTRUCTIONS

FOR AVALON PROOFING CABINET

MODEL NO. _____

SERIAL NO. _____

FOR YOUR SAFETY

Do not store gasoline or other flammable vapors or liquids in the vicinity of this or any other appliance.

WARNING: Improper installation, alteration, servicing or maintenance can cause property damage, injury, or death. Read the installation, operating, and maintenance instructions thoroughly before installing or servicing this equipment.

WARNING - ELECTRICAL GROUNDING INSTRUCTIONS: This appliance is equipped with a three-prong (grounding) plug for your protection against shock hazard and should be plugged directly into a properly grounded three-prong receptacle. Do not cut or remove the grounding prong from this plug.

WARNING: Before moving Proofing Cabinet always remove water from pan and any produce from inside cabinet. Check to make sure power switch is in off position and unplug from receptacle.

PLEASE RETAIN FOR FUTURE REFERENCE



509 Bateman Circle • Corona, CA 91720
TEL: (909) 340-0280 • FAX: (909) 340-0283
(800) 676-3040

AVALON PROOFING CABINET

(MODEL P264 SERIES)


(MODEL P34 SERIES)

1. Fill water pan to 3/4 full (Use Hot Water when starting your Proofing operation.)
2. Set Thermostat (Black Knob on Left side) for desired temperature ...140 Degrees as a starting position. Line up dial setting with slot or screw above. Increase or decrease as needed to best suit your operation.
3. Set Humidity Control (Silver knob to position Number 4). Line up dial setting with slot of screw above. This can be increased if necessary to suit your specific operation.
4. Turn on the power switch (Red light will come on).
5. Turn on the Blower switch.


ALL CONTROLS INCLUDING THE BLOWER FUNCTION INDEPENDENTLY FROM EACH OTHER. A PROPER SETTING FOR YOUR OPERATION CAN BE ACCOMPLISHED.

ALWAYS TURN THE UNIT ON AND OFF BY THE POWER SWITCH.

PROOFING CABINET

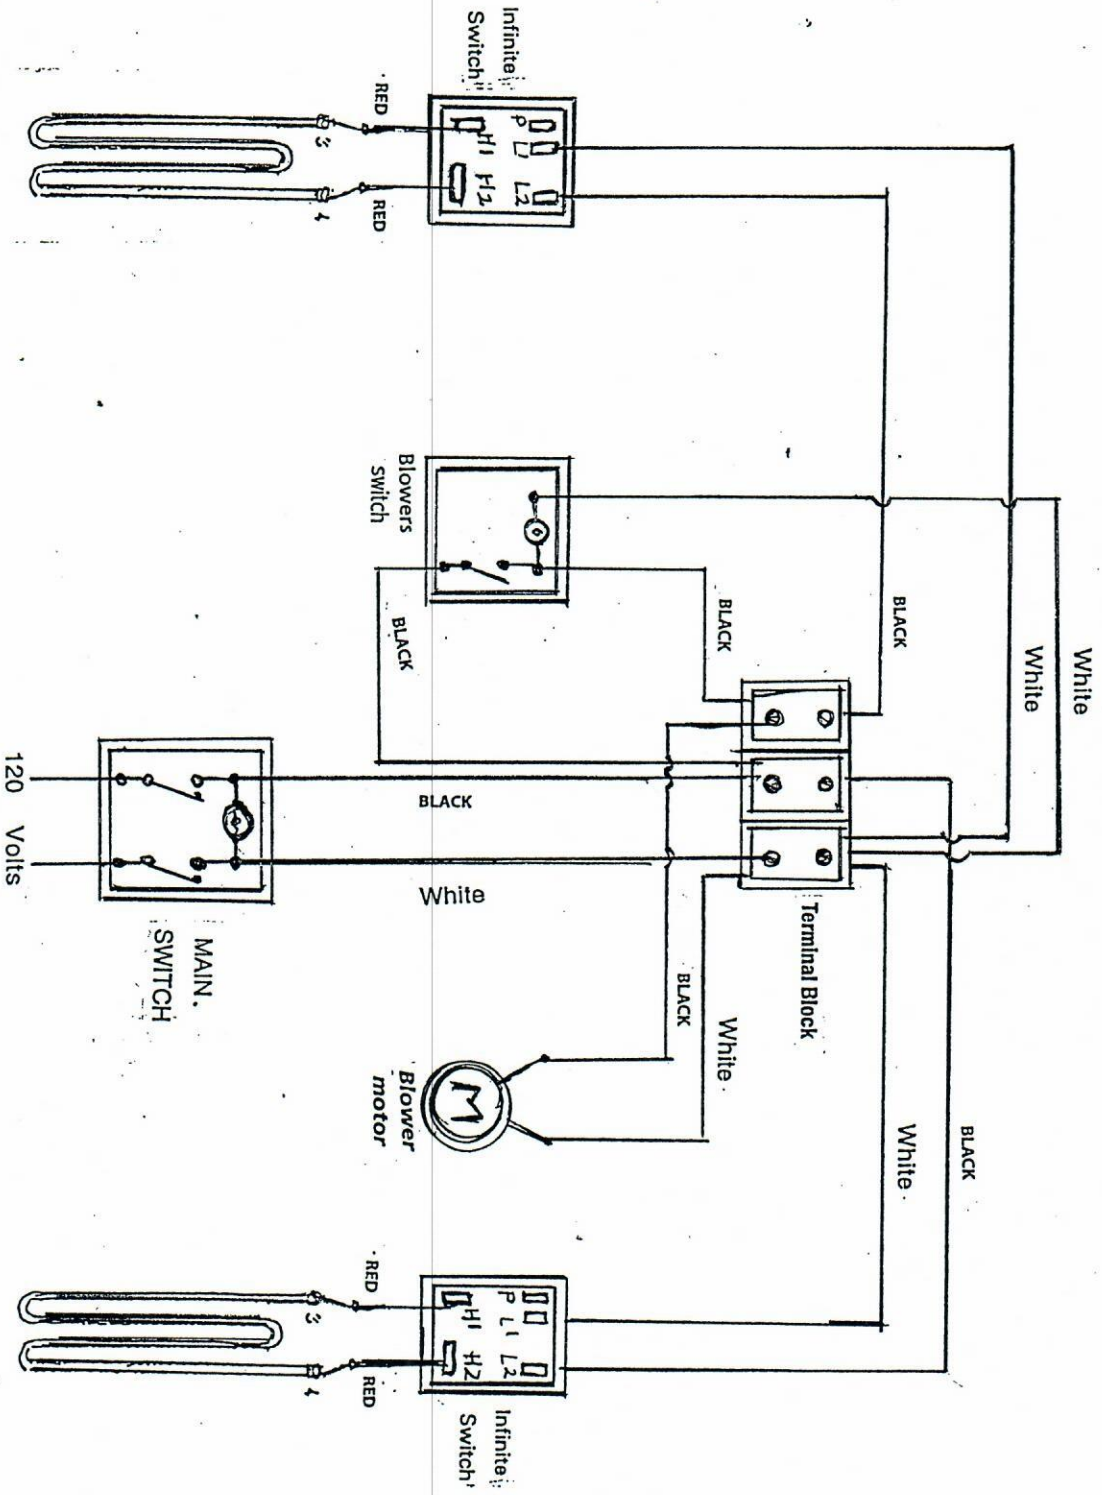

PROOFING CABINET

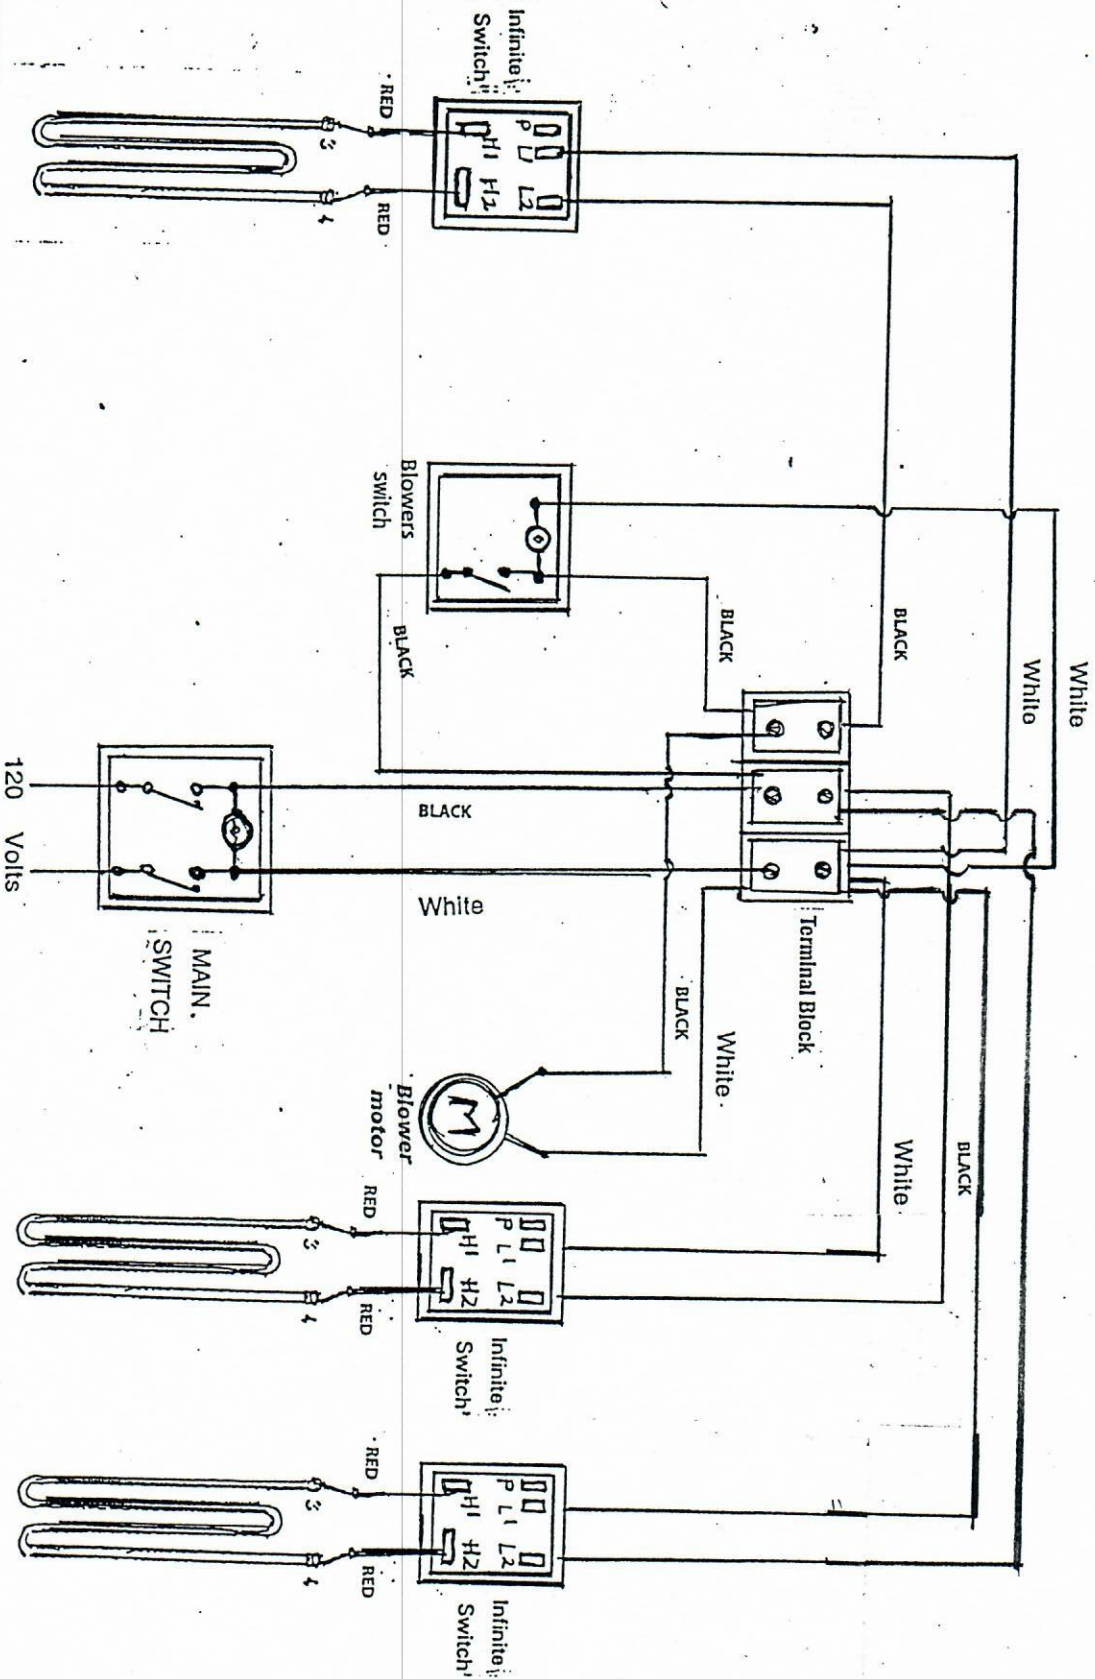

2/10/11



LIMITED WARRANTY

Avalon Mfg. warranty to the original purchaser that its equipment will be free from defects in workmanship for a period of one (1) year and that by labor cost(s) pertaining to the replacement or repair of said defective part will be covered by the manufacturer, (hereinafter referred to as Avalon), for a period of not more than ninety (90) days, both from the date of original sale.

The purchaser is responsible for proper installation, operation under normal conditions with proper supervision, and the performance of preventative maintenance. Avalon's obligation under this warranty shall be for the replacement or repair of said defective parts within the above mentioned warranty period. After thorough examination and inspection, decision of Avalon's Service Department and/or Avalon's Authorized Service Agencies shall be final. The procedure for parts replacement during the warranty period is as follows:

1. Avalon will ship and invoice new parts to the purchaser:
2. Credit for these new parts will be issued upon the receipt of defective parts.
3. All shipping charges for the return of these parts are the responsibility of the Purchaser.
4. All returned defective parts must be properly packed and tagged, stating serial number model number, invoice number(s), and date, before shipment to:

Avalon Mfg.
509 Bateman Circle
Corona. CA 92880

Avalon will not, however, assume responsibility for any expenses (including labor) incurred in the field incidental to the repair or replacement of equipment covered by this warranty or from the obtainment of the above information.

Avalon's obligation hereunder to repair or replace defective part(s) is the exclusive remedy for breach of this warranty; and Avalon will not be liable for any other damages or claims, including consequential damages.

Avalon will not honor any warranty for defective parts and labor should the Purchaser alter, abuse or misuse the equipment originally shipped in any way or if any part thereof has been used for other than specific purpose it was manufactured for.

No representative, dealer, distributor or any other person is authorized or permitted to make any other warranties or obligate Avalon to any liability that is not in strict accordance with this policy. THIS WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES, WHETHER EXPRESSED OR IMPLIED, INCLUDING ANY WARRANTY OF MERCHANTABILITY, AND FITNESS FOR A PARTICULAR PURPOSE AND AVALON DOES NOT HEREBY EXCLUDE AND SHALL NOT BE LIABLE TO PURCHASER FOR ANY CONSEQUENTIAL OR INCIDENTAL DAMAGES INCLUDING, BUT NOT LIMITED TO DAMAGES TO PROPERTY DAMAGES FOR LOSS OF USE, LOSS OF TIME, LOSS OF PROFITS, OR INCOME RESULTING FROM ANY BREACH OF WARRANTY.